


HITACHI
Inspire the Next



03Series
Narrow Bezel
Design

HITACHI
Inspire the Next

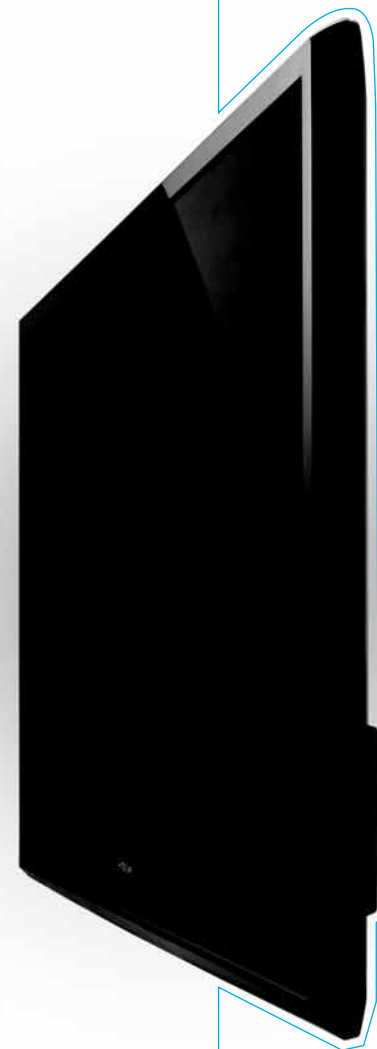

03 Series

Narrow Bezel Design

1920x1080
FULL HD

HD
ready

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE



X-Series

L42X03A

- 1920 x 1080 Full HD
- 100Hz / 120Hz
- Narrow Bezel
- 4 HDMI
- MP3 and JPEG Playback (via SD Card and USB)
- Swivel Stand



N-Series

L42N03A

L32N03A

L22N03A

- 1920 x 1080 Full HD (L42N03A)
- 1366 x 768 HD Ready (L32N03A & L22N03A)
- Narrow Bezel *
- 3 HDMI *
- Touch Sensor Buttons *



* Not applicable for L22N03A

A-Series

L32A03A

- 1366 x 768 HD Ready
- 2 HDMI



		L42X03A	L42N03A	L32N03A	L22N03A	L32A03A
DISPLAY	Screen Size	42 inch	42 inch	32 inch	22 inch	32 inch
	Number Of Pixels (H x V)	1920 x 1080	1920 x 1080	1366 x 768	1366 x 768	1366 x 768
	Brightness (Typical)	500cd/m ²	500cd/m ²	500cd/m ²	350cd/m ²	450cd/m ²
	Contrast Ratio (Panel / Dynamic)	4000:1 / 20,000:1	1400:1 / 20,000:1	1200:1 / 10,000:1	800:1 / -	1500:1 / -
INPUT SIGNAL	RF	V/U Tuner PAL B/G, D/K, I; SECAM B/G, D/K; NTSC M				
	RF Multiplex Teletext / Page Memory Video Signal Component Signal HDMI Signal (Video Mode) Analog RGB Signal	A2 / NICAM • / 1000 Pages PAL	A2 / NICAM • / 1000 Pages SECAM, NTSC3.58, NTSC4.43, PAL 60	A2 / NICAM • / 1000 Pages PAL, SECAM, NTSC	NICAM • / 10 Pages PAL, SECAM, NTSC	A2 / NICAM • / 1000 Pages PAL, SECAM, NTSC
SIGNAL INPUT AND TERMINALS	RGB Input	1	1	1	1	1
	AV Input	2	3	3	1	3
	S-Video Input	1	-	-	1	1
	Component Input	1	1	1	1	2
	HDMI Input	4	3	3	1	2
	SD Card Input	1	-	-	-	-
	USB Input	1	-	-	-	-
HDMI / RGB Audio (Analog) Input	1	1	1	1	1	
SIGNAL OUTPUT	Headphone	-	• (S/PDIF)	• (S/PDIF)	-	-
	Digital Audio Out	-	-	-	-	-
	AV Output	L,R	CVBS + L,R		-	CVBS + L,R
PICTURE	Y/C Comb Filter (NTSC / PAL)	• (3D)	• (3D)	• (3D)	• (2D)	• (3D)
	Digital Noise Reduction	•	•	•	•	•
	Picture Mode	•	•	•	•	•
	White Balance	•	•	•	•	•
	Color Transient Improvement	•	•	•	•	•
	Luminance Transient Improvement	•	•	•	•	•
	Film Mode	•	•	•	•	•
	Dynamic Contrast	•	•	•	•	•
	Dynamic Backlight	•	•	•	•	•
	Color Management	•	•	•	•	•
AUDIO	Sound Mode	•	•	•	•	•
	Auto Volume Leveller	•	•	•	•	•
	Audio Power (RMS)	10W + 10W	10W + 10W	10W + 10W	2W + 2W	7W + 7W
OPERATION	OSD Languages	English, T.Chinese**, S.Chinese, Russian**, Arabic, French**				
	Multi Picture	-	PIP (Main: AV4 / RGB / HDMI1-3; Sub: TV/AV1-3)		-	-
	Wide Mode	-	•	•	-	-
GENERAL	Power Requirement	AC110-240V, 50/60Hz	AC110-240V, 50/60Hz	AC110-240V, 50/60Hz	AC110-240V, 50/60Hz	AC110-240V, 50/60Hz
	Power Consumption	230W	180W	180W	150W	150W
	Dimensions (W x H x D) (Without Stand)	995 x 634 x 79mm	1004 x 637 x 103mm	778 x 512 x 103mm	528 x 355 x 75mm	807 x 525 x 95mm
	(With Stand)	995 x 683 x 348mm	1004 x 684 x 270mm	778 x 560 x 220mm	528 x 390 x 200mm	807 x 591 x 249mm
	Weight (Without Stand)	19.9kg	17.5kg	10.8kg	3.9kg	12.3kg
(With Stand)	24.9kg	19.8kg	11.5kg	4.3kg	14.0kg	
Stand	Manual Swivel	Fixed	Fixed	Fixed	Manual Swivel	

Specifications are subject to change without notice. The items indicated by "*" may not be available for some countries.
*1 Not available for L22N03A.

